


Input data

Refrigerant	R404A	
Reference temperature	Dew point temperature	
Calculation mode	Refrigeration / Air Cond.	
Operating mode	Subcritical	
Power supply	400/3/50	

Condensing temperature	°C	45
Condensing pressure	bar	20,47
Liquid subcooling	K	0
Liquid temperature	°C	44,67
Evaporating temperature	°C	-10
Evaporating pressure	bar	4,34
Suction gas superheating	K	10
Useful fraction of superheating	%	100

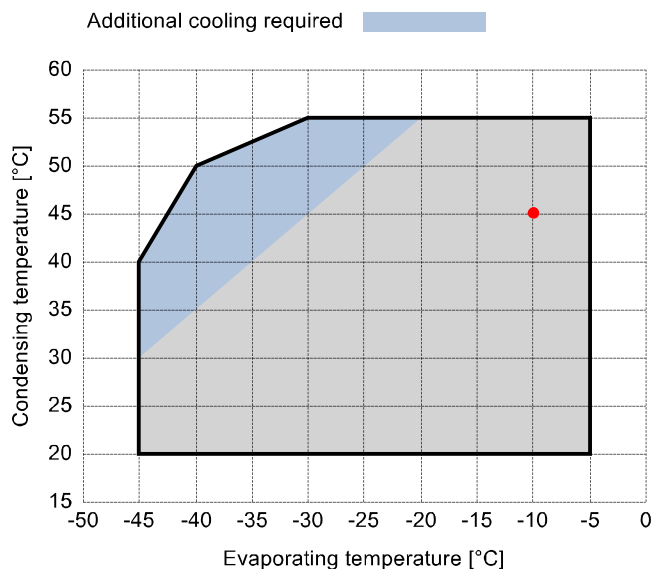

Output data

Compressor :	V30-123Y	
Number of compressors :	FSx1	
Refrigerating capacity	kW	57,358
Refrigerating capacity [*ref]	kW	61,458
Evaporator capacity	kW	57,358
Power input	W	29974
Condenser capacity, theor.	kW	87,332
Current	A	51,42
COP/EER	W/W	1,91
Mass flow	kg/h	2034
Operating frequency	Hz	50
Connection	-	PWS
Operating mode	-	100%
Discharge temperature	°C	76,08
Ratio (%)	%	100,0%
Note	-	
Oil flow	l/min	-
Heat Exchanged (oil Cooler)	kW	-
Oil Temp. at Oil Cooler Outlet	°C	-
Certified by	-	Frascold

Certified by:

- Frascold tentative data




Legend:

- *ref: At conditions according to EN12900
- Suction gas temperature = 20 °C
- Liquid subcooling = 0 K

All data subject to change without notice

P&I Diagram:

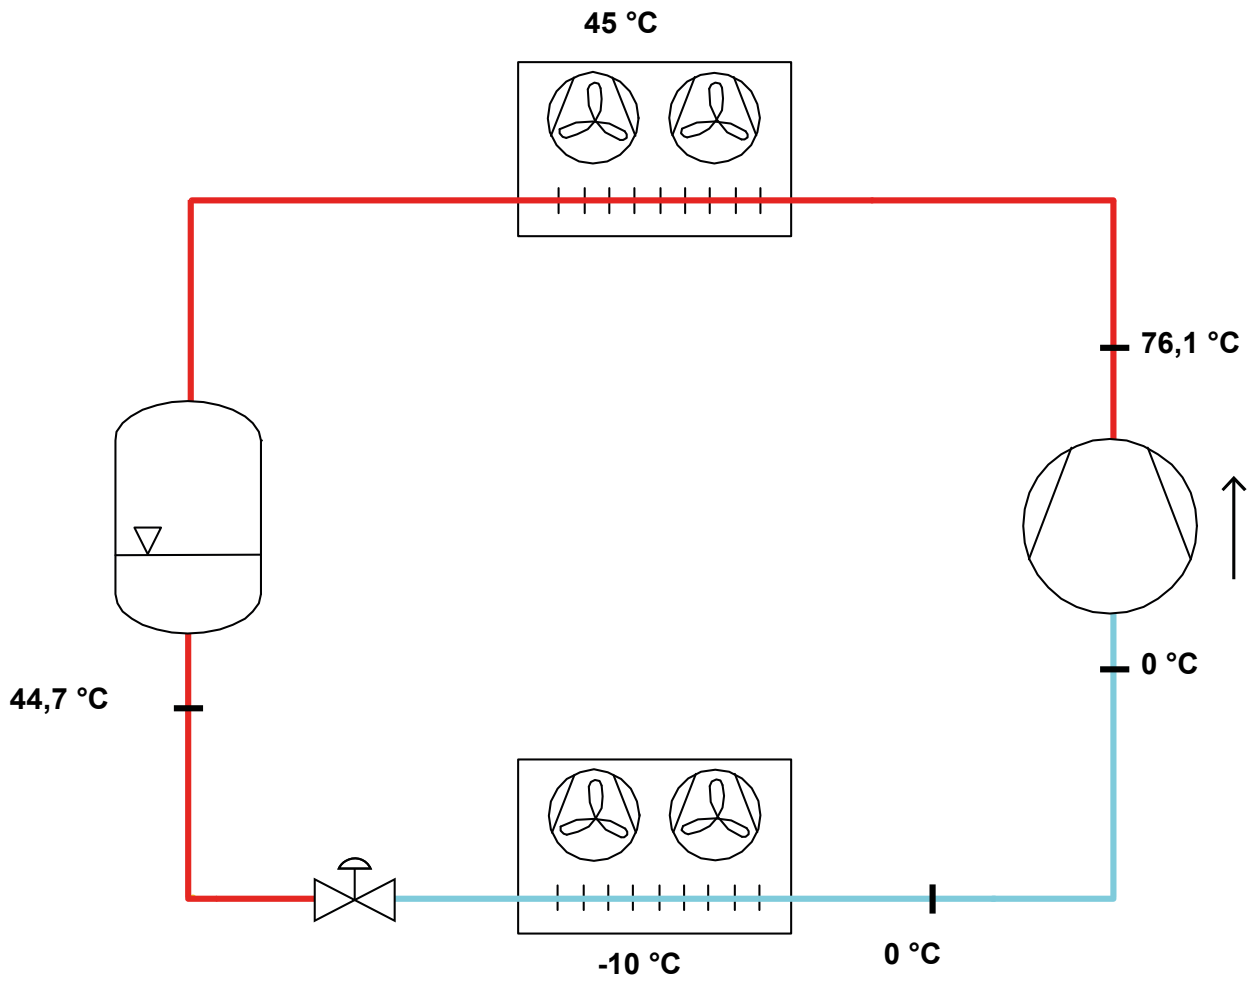

Model: V30-123Y

Refrigerant: R404A

Power supply: 400/3/50 PWS

Technical data:


Displacement	123,13 m³/h
Nominal compressor speed	1450 rpm
Motor voltage	400 V
Nominal operating frequency	50 Hz
Maximum allowed operating current (MRA)	60,5 A
Locked rotor current (LRA)	132,6 A
Locked rotor current (LRA), DOL	224,4 A
Number of pistons	4
Net weight	190 kg
Lubricant	FRASCOLD POE68
Oil charge	4 l
Maximum static pressure LP	20,5 bar
Maximum operating pressure HP	30 bar

Sound level:

Sound power level -10/45°C R404A @50Hz	81,5 dB(A)
Sound pressure (*) - Distance: 1 m	73,5 dB(A)
Sound power level -35/40°C R404A @50Hz	88 dB(A)
Sound pressure (*) - Distance: 1 m	80 dB(A)

*half sphere model

Motor connections:

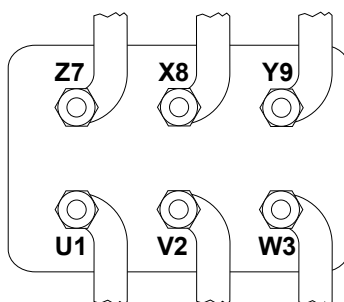




All data subject to change without notice

Model: V30-123Y

Refrigerant: R404A

Power supply: 400/3/50 PWS


Dimensions:

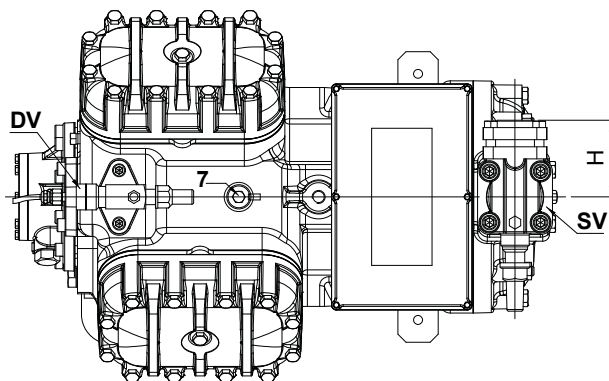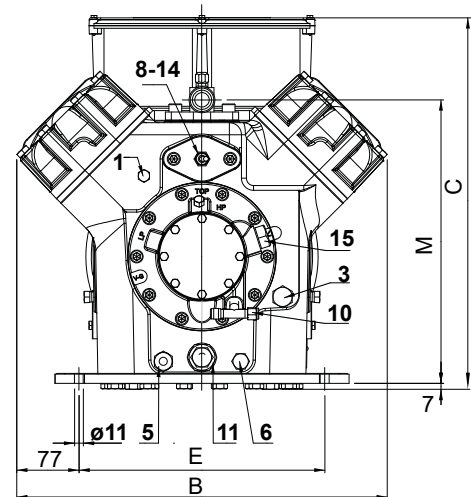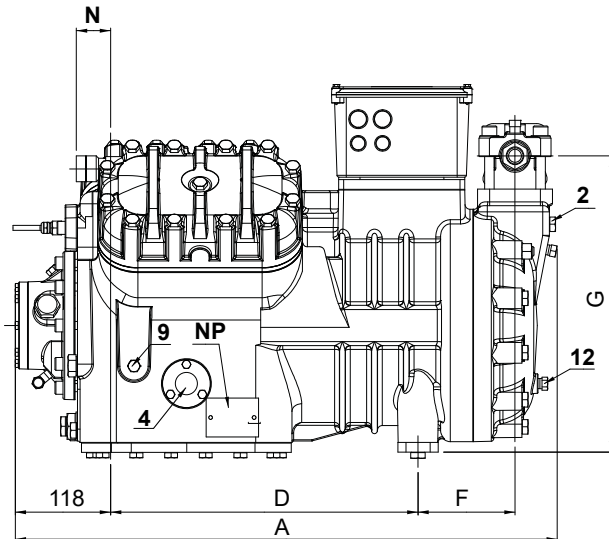

Supporto antivibrante

Vibration absorber

Vibrationsabsorber

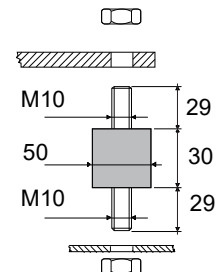

Legend:

SV: Suction Valve	2 1/8" - 54 mm	3: Oil charge plug	3/8" GAS
DV: Discharge valve	1 3/8" - 35 mm	4: Oil level sight glass	-
A: Length	743 mm	5: Crankcase heater seat	-
B: Width	460 mm	6: Oil drain plug	1/4" GAS
C: Height	463 mm	7: Liquid injection plug	1/4" NPT
D: Base mounting	381 mm	8: Liquid injection sensor plug	1/8" NPT
E: Base mounting	305 mm	9: Oil pressure switch connection (LP)	1/4" NPT
F: Suction Valve	158 mm	10: Oil pressure switch connection (HP)	1/4" SAE
G: Suction Valve	389 mm	11: Oil filter	3/8" GAS
H: Suction Valve	130 mm	12: Oil return plug	1/4" NPT
L: Discharge valve	152 mm	14: Max discharge temperature sensor connection	1/8" NPT
M: Discharge valve	352 mm	15: Electronic oil pressure switch connection	3/4 UNF
N: Discharge valve	48 mm	NP: Nameplate	
1: High pressure connection	1/8" NPT	DIMENSION UNITS:	mm
2: Low pressure connection	1/4" NPT	SECONDARY DIMENSION UNITS:	[in]

All data subject to change without notice

Model: V30-123Y

Refrigerant: R404A

Power supply: 400/3/50 PWS

Polynomial coefficients according to EN12900 for V30-123Y:

*S = T_{evap} ; D = T_{cond}

Reference conditions	
Refrigerant	R404A
Ambient temperature	35 °C
Suction gas temperature	20 °C
Liquid subcooling	0 K
Frequency	50 Hz

	Refrigerating capacity [W]	Power input [W]
C1	1,784940E+005	1,266504E+004
C2	5,854051E+003	-2,408301E+002
C3	-2,052195E+003	7,184969E+002
C4	6,360090E+001	-9,430789E+000
C5	-5,672565E+001	1,965917E+001
C6	2,122675E+000	-5,101792E+000
C7	2,100703E-001	-5,804341E-002
C8	-4,846028E-001	1,185839E-001
C9	1,676714E-002	-5,200841E-002
C10	4,368971E-003	1,146272E-002

$$Y = C1 + C2*S + C3*D + C4*S^2 + C5*S*D + C6*D^2 + C7*S^3 + C8*D*S^2 + C9*S*D^2 + C10*D^3$$